BM Series 20



Your recycling needs. Our grinding solutions.

Granulators dedicated to small blow molding scrap recovery. The new BM 20 series can either work off-line or in-line.

The compact footprint and the available options of the hoppers style guarantees flexibility for the customer needs.



Rotary discs integral with the rotor and containment rings. Scissors cutting configuration.



Grinding chamber suitable for small hollow

pieces. Screen surface equal to approx. 50% of the knives rotation length.



Access without tools to the main parts subject to ordinary maintenance. Moving on castors.





Grinding chamber in antiwear execution

Roller bearings mounted to the grinding chamber and fixed to the circumference.



Integrated electric control panel. Safety devices and circuit in compliance with EEC Directives.

BM Series 20

FEATURES BM 4220

Feeding opening (mm): 420 x 200 Nr. rotating / fixed knives: 3 / 2 Rotor speed (RPM): 315 Rotor diameter (mm): 180

Motor (kW): 3 Weight (kg): 380


Standard screen (mm): 7

Indicative throughput (kg/hr): 50 ÷ 80

OPTIONAL

- A) Knives and screen in antiwear execution
- B) Soundproof rigid flap
- C) Not soundproof version
- D) Level control
- E) Discharge for hopper loader
- F) Discharge with auger screw
- G) EC extractor with storage
- H) Discharge with suction group on board
- I) Discharge with suction group not on board

DIMENSIONS

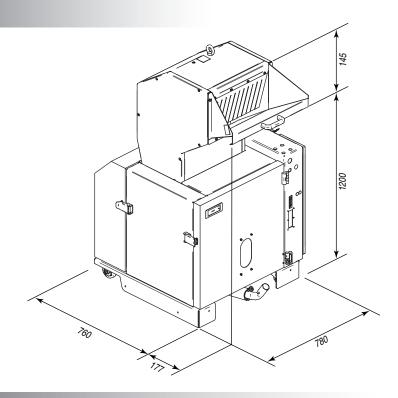

ACCESSORIES

