




Conveyor with adjustable flat upper section



Main Characteristics

- ▶ Sturdy frame made of primary extrusion aluminium section, Alloy 6060, protected by anodisation average thickness 15 micron.
- ▶ Standard cut-proof, oil-proof belt with green high grip PVC covering (ref. Pantone 320); vulcanized belt joint.
- ▶ Minimum and maximum temperature resistance of belt: 10°C to +60°C.
- ▶ Standard transmission group consisting of 0.12 kW, three-phase, asynchronous motor coupled with worm reduction unit with permanent lubrication.
- ▶ Fixed standard conveyor speed 3m/min.
- ▶ Conveyor complete with Siemens Start and Stop switch/motor cut-out, with 5m cable and 4P CE plug (3 phases+ground).
- ▶ Standard motor supply voltage 400 Volts/50 Hz.

Standard Dimensional Features

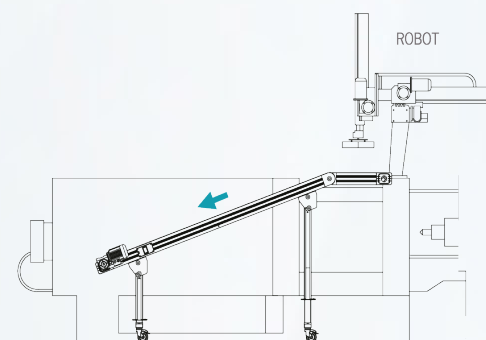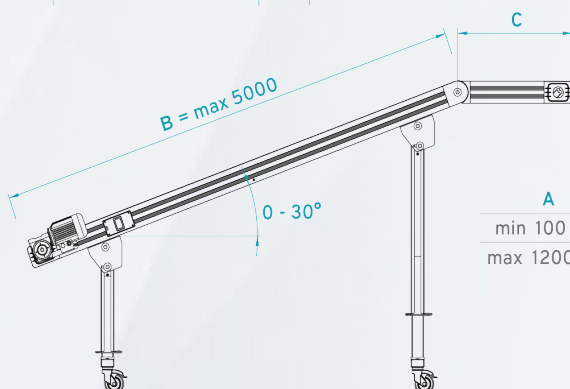

Example of application

A	B	C
min 100 mm	min 600 mm	min 600 mm
max 1200 mm	max 5000 mm	max 1000 mm



☎ +44 (0) 1827 265 800

✉ info@summitsystems.co.uk

🌐 www.summitsystems.co.uk