



## CONVEYORS

# Solutions to any product handling needs along the production line!

Dramatically reduce labour intervention with MB Conveyors, offering multi and bespoke solutions.




Model: Conveyor with paddle separator (N-CPST)

Providing simple automation for the moving of parts from machines.

### CONVEYOR WITH PADDLE SEPARATOR

- ❖ Constructed from anodized aluminium profile.
- ❖ Different frame designs and belt types.
- ❖ Variable speed control and run/stop timer programming.
- ❖ Water & air cooling available.

- Up to a max height of 1030mm
- Up to a max width of 440mm

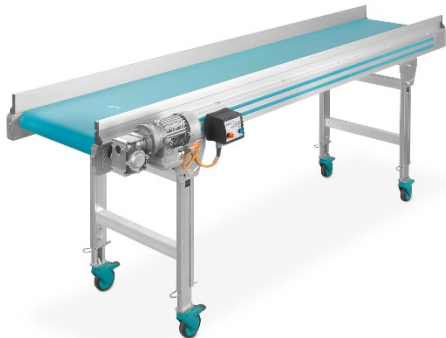

Model: Standard Flat Conveyor (PA 110)

### STANDARD FLAT CONVEYOR

- ❖ Min and max temperature resistance of belt -10° C to +90°C.
- ❖ Fixed standard speed 3m/min.
- ❖ Standard cut-proof, oil-proof belt with smooth green Polyurethane covering.
- ❖ Easy Clean

- Up to a max height of 2000mm
- Up to a max width of 2000mm
- Up to a length of 60m



Model: Bespoke cooling Flat conveyor

### BESPOKE CONVEYORS

- ❖ Ideal for cooling product with the use of electrical cooling fans whilst being conveyed.
- ❖ Teflon belt 2mm dia.
- ❖ Max temp 100°C.
- ❖ Polycarbonate tunnel.



Model: Duck Dispenser

### DUCK DISPENSER

- ❖ Simple and versatile system for filling containers with product.
- ❖ The chute of the DUCK dispenser can turn through 360°.
- ❖ The filling positions can be set in any point of the 360° turn.
- ❖ DUCK allows several filling points to be set in the same container, thus preventing product from building up in a pyramid.



Office

01827 265800



Email

Info@summitsystems.co.uk



Twitter

@SummitSystems



LinkedIn

Summit Systems Ltd

[Watch video >>](#)