

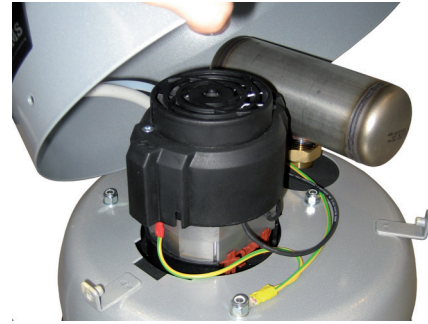


Single Phase Hopper Loader

Material Handling



Double-stage blower

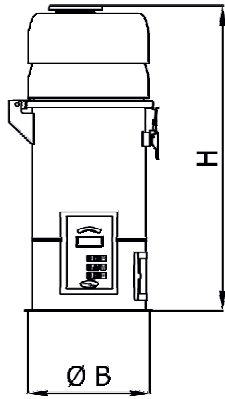

Easy maintenance

| Technical Data | SVLM2 | SVLM4 | SVLM5 | SVLM10 | VLM25 |
|----------------------------|-------------|-------------|-------------|-------------|---------------|
| Suction capacity (kg/h) | 40 | 60 | 80 | 120 | 600 |
| Receiver volume (l) | 2 | 4 | 5 | 10 | 25 |
| Depression (kPa) | 18 | 18 | 21 | 21 | 21 |
| Noise level (dB(A)) | <80 | <80 | <80 | <80 | <80 |
| Motor power (kW) | 0.85 | 0.85 | 0.9 | 0.9 | 1.8 |
| Voltage / frequency (V/Hz) | 230/50-60 | 230/50-60 | 230/50-60 | 230/50-60 | 230/50-60 |
| Material inlet A (mm) | 40 | 40 | 40 | 40 | 50/60 |
| Fixing diameter (mm) | 210 | 210 | 280 | 280 | 280 |
| Dimensions WxDxH (mm) | 210x330x430 | 210x330x530 | 280x405x550 | 280x408x700 | 280x404.5x911 |
| Weight (kg) | 7 | 8 | 10 | 12 | 30 |